
FURTUN GPL

PVC gas hose with a yellow identification stripe and polyester fabric reinforcement for supplying liquefied petroleum gas to domestic appliances

Applications	sanitary, house entries, compressed air
Structure	PVC, blue, opaque
Temperature	-15°C up to 60°C
Properties	good ozone- & UV-resistance, good flexibility, smooth inside, smooth outside, good temperature resistance, good tensile strength
Norms	UNI 7140, IEMMEQ S1728
Optional	different diameters and different lengths available by request

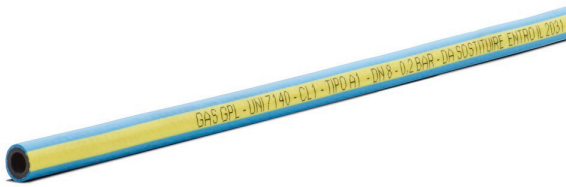

air

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
8	13,30	2,65	20,00	60,00	5,50	50	110839008050

Ocono Romania SRL | Bd. Valea Belciugatele nr. 15 | Comuna Belciugatele | Călărași, 917010 | Romania | T +40 374 20076-5/6 | romania@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 23.11.2026