
FURTUN ALIMENTAR GLASS CLEAR

Multilayer compressed air hose made of PVC with highly tear-resistant Polyester fabric

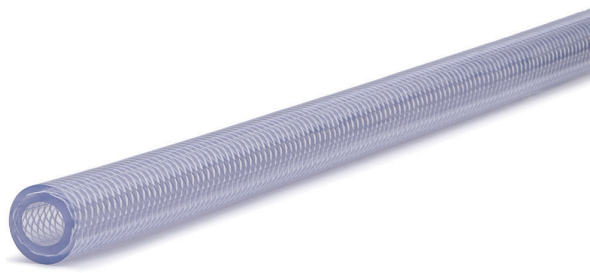

Applications compressed air, compressors, food production & -conveying, printing machines, water drain

Structure soft PVC, uncolored, transparent, cross braid

Temperature -20°C up to 65°C

Properties good flexibility, good tensile strength, ultimate elongation, crush-resistant, high pressure resistance, very smooth inside, smooth outside, phthalate-free

Norms material according to Food EU Directive (EC) No. 1935/2004 & Regulation (EC) No. 10/2011 for A, B, C | certified according to Food EU Directive (EC) No. 1935/2004 & Regulation (EC) No. 10/2011 for A, B, C





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
6	12,00	3,00	25	25,00	0,10800	5,40	50	110206006050
8	14,00	3,00	30	24,00	0,12600	6,30	50	110206008050
10	16,00	3,00	40	21,00	0,15600	7,80	50	110206010050
13	20,00	3,50	72	16,00	0,23100	11,55	50	110206013550
13	19,00	3,00	70	15,00	0,19200	9,60	50	110206013050
16	22,00	3,00	75	15,00	0,21940	10,97	50	110206016050
16	23,00	3,50	75	15,00	0,27300	13,65	50	110206016150
19	25,00	3,00	125	10,00	0,25400	12,70	50	110206019050
25	33,00	4,00	200	9,00	0,46400	23,20	50	110206025050
32	42,00	5,00	310	8,00	0,74000	37,00	50	110206032050
38	48,00	5,00	420	6,00	0,86000	43,00	50	110206038050
50	60,00	5,00	650	4,00	1,10000	55,00	50	110206050050

Ocono Romania SRL | Bd. Valea Belciugatele nr. 15 | Comuna Belciugatele | Călărași, 917010 | Romania | T +40 374 20076-5/6 | romania@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 23.11.2026