


SUPERELASTICO

Very flexible hose made of soft PVC, reinforced with an shock resistant rigid PVC spiral

Applications	liquid manure spreading, waste water, sewage treatment plants, agriculture, water drain
Structure	PVC / soft PVC, blue, opaque, plastic spiral / rigid PVC
Temperature	-25°C up to 60°C
Properties	very good flexibility, crush-resistant, very high vacuum resistance, high pressure resistance, with external abrasion protection spiral, very smooth inside, corrugated outside

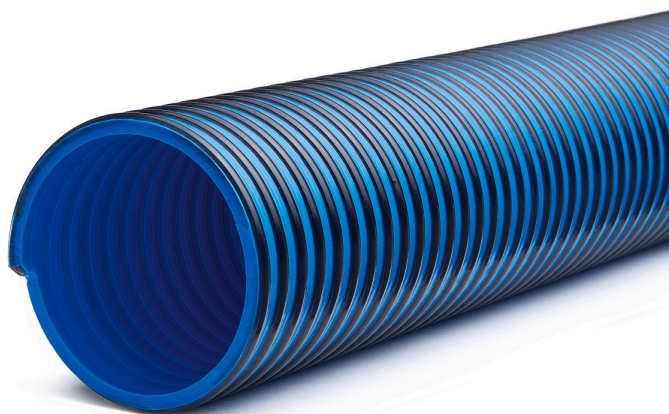

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
51	61,40	5,20	160	5,00	0,88	1,04000	52,00	50	100396051050
76	87,60	5,80	250	4,00	0,88	1,70000	85,00	50	100396076050
90	91,60	6,80	260	4,00	0,88	2,20000	110,00	50	100396090050
102	116,40	7,20	320	3,00	0,88	2,75000	137,50	50	100396102050
110	125,00	7,50	350	3,00	0,88	3,00000	150,00	50	100396110050
125	140,60	7,80	400	3,00	0,88	3,60000	108,00	30	100396127030
152	170,00	9,50	500	3,00	0,88	5,26000	123,75	25	100396152025
203	224,00	10,50	1.015	2,00	0,88	9,35000	182,50	25	100396203025