# APDatec 412


Flexible PVC hose with shock-resistant rigid PVC spiral

**Applications** air & cooling technology, extraction systems, extractions arms, air supply, steam extraction

**Structure** soft PVC, grey / anthracite grey (similar RAL 7016), opaque, plastic spiral / rigid PVC

**Temperature** -10°C up to 60°C

**Properties** very good flexibility, corrugated outside, smooth inside, good chemical resistance, good ozone- & UV-resistance

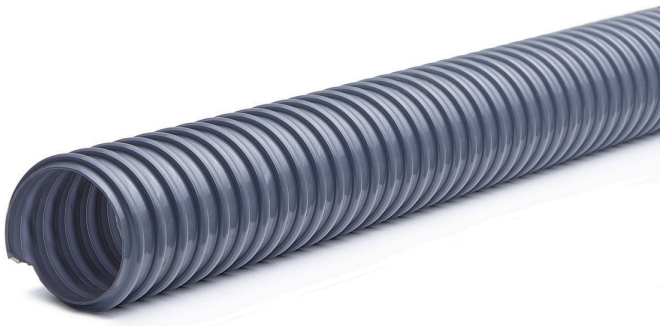







made in Germany

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Vacuum Max. (bar) | Weight (kg/m) | Total Weight per Piece (kg) | Length (m) | Article Number |
|---|---|---|---|---|---|---|---|---|
| 250 | 264,00 | 7,00 | 250 | 0,10 | 3,25000 | 32,45 | 20 | 100412250020 |



Ocono Romania SRL | Bd. Valea Belciugatele nr. 15 | Comuna Belciugatele | Călărași, 917010 | Romania | T +40 374 20076-5/6 | romania@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 23.11.2026