


PU 600 C ECO COMPRESSED

Light weight and very flexible spiral hose made of Polyether-Polyurethane

- Applications** extraction systems, extractions arms, venting, dust extraction, textile fiber extraction
- Structure** TPU / Polyether-Polyurethane, uncolored, transparent, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 90°C, short term up to 125°C
- Properties** light weight, very good flexibility, very good abrasion resistance, good tensile strength, ultimate elongation, hydrolysis & microbe resistant, good ozone- & UV-resistance, weather proof, rot proof

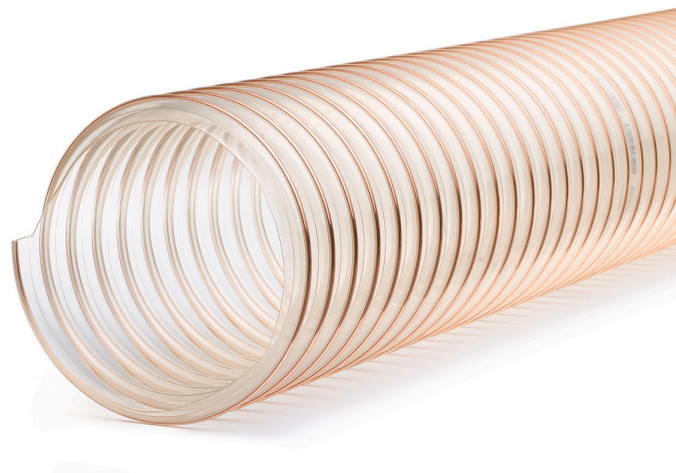

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Operating Pressure (bar) | Vacuum Max. (bar) | Weight (kg/m) | Length (m) | Article Number |
|---------------------|---------------------|---------------------|---------------------|--------------------------|-------------------|---------------|------------|----------------|
| 90 | 95,00 | 0,60 | 90 | 0,40 | 0,15 | 0,55300 | 10 | 100306090010 |
| 90 | 95,00 | 0,60 | 90 | 0,40 | 0,15 | 0,55300 | 15 | 100306090015 |
| 102 | 108,00 | 0,60 | 102 | 0,30 | 0,10 | 0,61000 | 10 | 100306102010 |
| 102 | 108,00 | 0,60 | 102 | 0,30 | 0,10 | 0,61000 | 15 | 100306102015 |
| 110 | 116,00 | 0,60 | 110 | 0,30 | 0,10 | 0,65500 | 15 | 100306110015 |
| 110 | 116,00 | 0,60 | 110 | 0,30 | 0,10 | 0,65500 | 10 | 100306110010 |
| 120 | 126,00 | 0,60 | 120 | 0,30 | 0,10 | 0,71400 | 10 | 100306120010 |
| 120 | 126,00 | 0,60 | 120 | 0,30 | 0,10 | 0,71400 | 15 | 100306120015 |
| 125 | 131,00 | 0,60 | 125 | 0,30 | 0,10 | 0,74400 | 10 | 100306125010 |
| 125 | 131,00 | 0,60 | 125 | 0,30 | 0,10 | 0,74400 | 15 | 100306125015 |
| 130 | 136,00 | 0,60 | 130 | 0,30 | 0,10 | 0,77300 | 10 | 100306130010 |
| 130 | 136,00 | 0,60 | 130 | 0,30 | 0,10 | 0,77300 | 15 | 100306130015 |
| 140 | 146,00 | 0,60 | 140 | 0,30 | 0,10 | 0,79200 | 10 | 100306140010 |
| 140 | 146,00 | 0,60 | 140 | 0,30 | 0,10 | 0,79200 | 15 | 100306140015 |
| 150 | 156,00 | 0,60 | 150 | 0,30 | 0,10 | 0,84800 | 10 | 100306150010 |
| 150 | 156,00 | 0,60 | 150 | 0,30 | 0,10 | 0,84800 | 15 | 100306150015 |
| 160 | 166,00 | 0,60 | 160 | 0,20 | 0,05 | 0,90300 | 10 | 100306160010 |
| 160 | 166,00 | 0,60 | 160 | 0,20 | 0,05 | 0,90300 | 15 | 100306160015 |
| 180 | 186,00 | 0,60 | 180 | 0,20 | 0,05 | 1,01500 | 10 | 100306180010 |
| 180 | 186,00 | 0,60 | 180 | 0,20 | 0,05 | 1,01500 | 15 | 100306180015 |
| 203 | 210,00 | 0,60 | 203 | 0,20 | 0,05 | 1,18700 | 10 | 100306203010 |
| 203 | 210,00 | 0,60 | 203 | 0,20 | 0,05 | 1,18700 | 15 | 100306203015 |

| Inner Diameter (mm) | Outer Diameter (mm) | Wall Thickness (mm) | Bending Radius (mm) | Operating Pressure (bar) | Vacuum Max. (bar) | Weight (kg/m) | Length (m) | Article Number |
|---------------------|---------------------|---------------------|---------------------|--------------------------|-------------------|---------------|------------|----------------|
| 280 | 287,00 | 0,60 | 280 | 0,10 | 0,02 | 1,71400 | 10 | 100306280010 |
| 280 | 287,00 | 0,60 | 280 | 0,10 | 0,02 | 1,71400 | 15 | 100306280015 |
| 350 | 357,00 | 0,60 | 350 | 0,10 | 0,02 | 2,27000 | 10 | 100306350010 |
| 350 | 357,00 | 0,60 | 350 | 0,10 | 0,02 | 2,27000 | 15 | 100306350015 |