
APDATEC 102

Flexible PVC hose with shock-resistant rigid PVC spiral



Applications	pond technology, pump technology, irrigation, agriculture, water drain
Structure	soft PVC, black, opaque, plastic spiral / rigid PVC
Temperature	-5°C up to 60°C
Properties	good flexibility, smooth inside, corrugated outside, , weather proof, phthalate-free



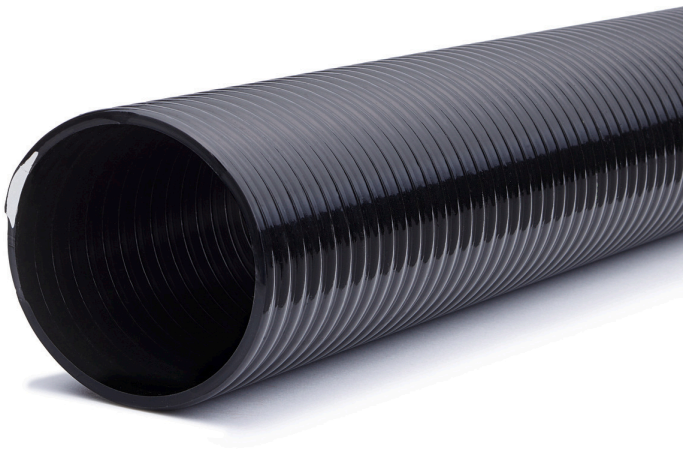

made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
40	46,60	3,30	170	5,00	0,69	0,47000	11,75	0	112525040025

Ocono Romania SRL | Bd. Valea Belciugatele nr. 15 | Comuna Belciugatele | Călărași, 917010 | Romania | T +40 374 20076-5/6 | romania@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 24.11.2026