


## FURTUN VENTILATIE P2 A1000

Light weight and highly flexible spiral hose made of PVC-coated polyester fabric

- Applications** extractions arms, fume extraction, welding gas extraction, air & cooling technology, ventilation
- Structure** coated fabrics / PVC coated polyester fabric, grey / silver grey (similar RAL 7001), opaque, steel wire / spring steel wire / not coated / copper plated
- Temperature** -30°C up to 80°C, short term up to 100°C
- Properties** excellent flexibility, good temperature resistance, good low-temperature flexibility, excellent axial compressibility, particularly small bending radius ( $r < d$ ), flame-retardant, self-extinguishing
- Norms** flame-retardant according to UL 94 fire protection standard / VO
- Optional** - black polyester fabric

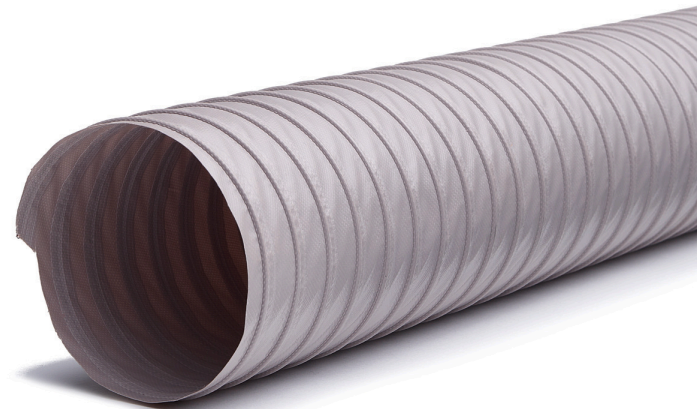

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
60	63,00	0,25	42	0,80	0,16	2,17	10	100351060010
102	106,00	0,25	74	0,50	0,09	3,51	10	100350100010
120	124,00	0,25	85	0,50	0,08	4,11	10	100350120010
152	156,00	0,25	108	0,20	0,06	5,18	10	100350152010
180	185,00	0,25	120	0,20	0,05	7,21	10	100350180010
203	208,00	0,25	145	0,20	0,05	8,11	10	100350203010
254	259,00	0,25	180	0,10	0,04	10,11	10	100350254010
300	305,00	0,25	210	0,06	0,03	11,91	10	100350300010