FLEXADUX® P4 SIL II


Light weight, two-ply spiral tube made of silicone

Applications extraction systems, vehicle construction, steam extraction, granule drying, automation technology & robotics

Structure silicone coated glass fabric, brown / red brown (similar RAL 8012), opaque, steel wire / spring steel wire / not coated / copper plated

Temperature -70°C up to 250°C, short term up to 300°C

Properties light weight, excellent flexibility, very good temperature resistance, , good chemical resistance

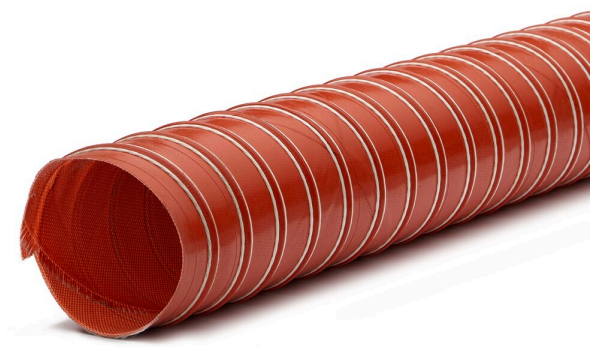





Inner Diameter (mm)	Outer Diameter (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
25	28,20	25	2,80	0,65	0,88	4	101102025004
38	41,20	38	2,60	0,60	1,20	4	101102038004
41	44,20	41	2,40	0,58	1,28	4	101102041004
44	47,20	44	2,40	0,58	1,34	4	101102044004
51	54,74	51	2,40	0,53	1,40	4	101102051004
55	58,74	55	2,30	0,53	1,64	4	101102055004
60	63,74	60	2,20	0,53	1,84	4	101102060004
63	66,74	63	2,20	0,48	1,92	4	101102063004
76	79,74	76	2,20	0,43	2,28	4	101102076004
80	83,74	80	2,10	0,40	2,44	4	101102080004
83	86,74	83	2,10	0,40	2,52	4	101102083004
102	106,20	102	1,90	0,35	3,56	4	101112102004
127	131,70	127	1,40	0,25	4,00	4	101102127004
152	157,20	152	1,20	0,15	4,80	4	101102152004

Ocono Romania SRL | Bd. Valea Belciugatele nr. 15 | Comuna Belciugatele | Călărași, 917010 | Romania | T +40 374 20076-5/6 | romania@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 23.11.2026