


PU 600 C ECO COMPRESSED

Light weight and very flexible spiral hose made of Polyether-Polyurethane

- Applications** extraction systems, extractions arms, venting, dust extraction, textile fiber extraction
- Structure** TPU / Polyether-Polyurethane, uncolored, transparent, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 90°C, short term up to 125°C
- Properties** light weight, very good flexibility, very good abrasion resistance, good tensile strength, ultimate elongation, hydrolysis & microbe resistant, good ozone- & UV-resistance, weather proof, rot proof

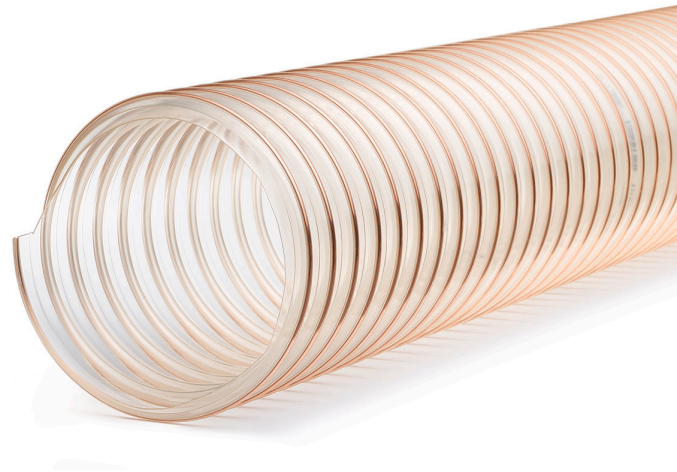

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Length (m)	Article Number
90	95,00	0,60	90	0,40	0,15	0,55300	10	100306090010
90	95,00	0,60	90	0,40	0,15	0,55300	15	100306090015
102	108,00	0,60	102	0,30	0,10	0,61000	15	100306102015
102	108,00	0,60	102	0,30	0,10	0,61000	10	100306102010
110	116,00	0,60	110	0,30	0,10	0,65500	10	100306110010
110	116,00	0,60	110	0,30	0,10	0,65500	15	100306110015
120	126,00	0,60	120	0,30	0,10	0,71400	10	100306120010
120	126,00	0,60	120	0,30	0,10	0,71400	15	100306120015
125	131,00	0,60	125	0,30	0,10	0,74400	10	100306125010
125	131,00	0,60	125	0,30	0,10	0,74400	15	100306125015
130	136,00	0,60	130	0,30	0,10	0,77300	10	100306130010
130	136,00	0,60	130	0,30	0,10	0,77300	15	100306130015
140	146,00	0,60	140	0,30	0,10	0,79200	10	100306140010
140	146,00	0,60	140	0,30	0,10	0,79200	15	100306140015
150	156,00	0,60	150	0,30	0,10	0,84800	10	100306150010
150	156,00	0,60	150	0,30	0,10	0,84800	15	100306150015
160	166,00	0,60	160	0,20	0,05	0,90300	10	100306160010
160	166,00	0,60	160	0,20	0,05	0,90300	15	100306160015
180	186,00	0,60	180	0,20	0,05	1,01500	10	100306180010
180	186,00	0,60	180	0,20	0,05	1,01500	15	100306180015
203	210,00	0,60	203	0,20	0,05	1,18700	10	100306203010
203	210,00	0,60	203	0,20	0,05	1,18700	15	100306203015

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Length (m)	Article Number
280	287,00	0,60	280	0,10	0,02	1,71400	10	100306280010
280	287,00	0,60	280	0,10	0,02	1,71400	15	100306280015
350	357,00	0,60	350	0,10	0,02	2,27000	15	100306350015
350	357,00	0,60	350	0,10	0,02	2,27000	10	100306350010