


ONEFLAT SL

Lightweight PVC flat hose with polyester fabric reinforcement for water conveyance, hydraulic protection and drainage applications in the construction industry

Applications	pump technology, water drain, irrigation, construction machines, agriculture
Structure	PVC / soft PVC coated fabrics / PVC coated polyester fabric, blue, opaque
Temperature	-20°C up to 65°C
Properties	good flexibility, good tensile strength, good temperature resistance, high pressure resistance
Optional	different diameters and different lengths available by request

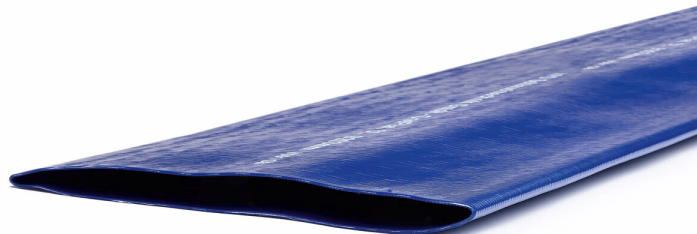

Inner Diameter (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
127	3,00	10,00	37,50	50	111274127050
127	3,00	10,00	75,00	100	111274127100
152	3,00	10,00	45,00	50	111274152050
152	3,00	10,00	90,00	100	111274152100
203	2,00	8,00	80,00	50	111274203050