


## SMARTFLEX 1.4

Medium weight and flexible spiral hose made of Polyurethane, flame retardant

- Applications** wood dust extraction, sawing & milling, grass extraction, leaf extraction, conveying of abrasive media
- Structure** TPU / Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 100°C, short term up to 125°C
- Properties** flame-retardant, permanently antistatic ( $R < 10^9$  Ohm), hydrolysis & microbe resistant, good flexibility, very smooth inside, corrugated outside
- Norms** flame-retardant according to DIN 4102 / B1 | TRBS 2153/TRGS 727, ATEX 2014/34/EU / pneumatic transport of combustible dusts (inside: zone 20, 21, 22), ATEX 2014/34/EU / conveying of flammable liquids (inside: zone 0, 1, 2) | discharge capability according to BGI 739-2 with spiral earthing | DIN 26057-3

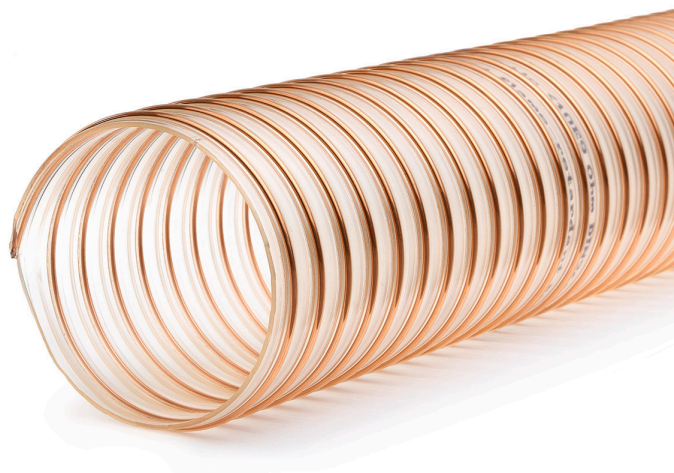

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
60	69,00	1,40	60	2,25	0,55	11,48	15	100316060015
70	79,00	1,40	70	2,00	0,55	8,87	10	100316070010
100	110,00	1,40	100	1,21	0,40	20,26	15	100316100015
110	120,00	1,40	110	1,15	0,38	15,81	10	100316110010
300	311,00	1,40	300	0,30	0,10	41,54	10	100316300010
400	411,00	1,40	400	0,25	0,09	91,24	15	100316400015
450	461,00	1,40	450	0,13	0,08	68,34	10	100316450010