
AGROFLAT

Abrasion-resistant NBR flat hose with polyester fabric reinforcement for irrigation, pumping systems and industrial applications

Applications	irrigation, agriculture, pump technology, construction machines, cleaning
Structure	NBR coated fabrics, black, opaque, cross braid
Temperature	-30°C up to 80°C
Properties	very high pressure resistance, very good abrasion resistance, very good flexibility, very good low-temperature flexibility, good oil & petrol resistance
Optional	different diameters and different lengths available by request





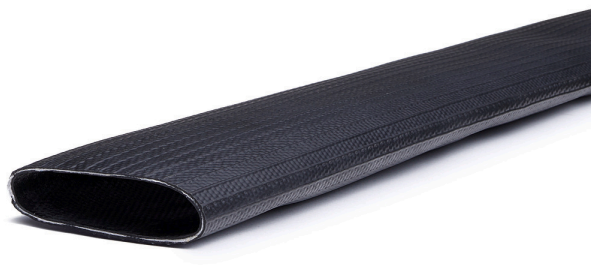

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
25	28,90	1,95	30,00	90,00	12,50	50	111299025050
38	41,90	1,95	21,00	62,00	17,25	50	111299038050
50	54,00	2,00	20,00	60,00	23,00	50	111299050050
75	80,00	2,50	17,00	45,00	39,50	50	111299075050
90	94,70	2,35	15,00	45,00	46,50	50	111299090050
102	107,00	2,50	17,00	52,00	51,50	50	111299100050
110	114,80	2,40	15,00	45,00	58,00	50	111299110050
125	130,40	2,70	15,00	45,00	70,00	50	111299125050
152	157,20	2,60	14,00	42,00	82,50	50	111299150050
204	211,60	3,80	14,00	42,00	155,00	50	111299200050
304	311,80	3,90	8,00	25,00	235,00	50	111299300050

Ocono Romania SRL | Bd. Valea Belciugatele nr. 15 | Comuna Belciugatele | Călărași, 917010 | Romania | T +40 374 20076-5/6 | romania@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 23.11.2026