
FURTUN BEHKALIT

Flexible single layer hose made of soft PVC, food grade phthalate-free

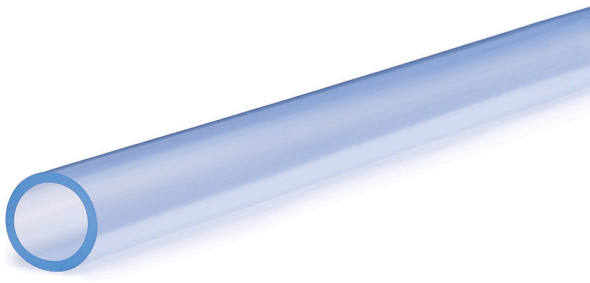

Applications beverage production & conveying, food production & -conveying, water drain, aquariums, automation technology & robotics

Structure soft PVC, uncolored, transparent

Temperature -20°C up to 65°C

Properties good flexibility, good chemical resistance, phthalate-free

Norms material according to Food EU Directive (EC) No. 1935/2004 & Regulation (EC) No. 10/2011 for A, B, C | Tolerances in accordance with DIN 16940





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
3	5,00	1,00	8,00	0,01500	1,50	100	184010003100
4	6,00	1,00	6,50	0,01920	1,92	100	184010004100
5	7,00	1,00	6,00	0,02310	2,31	100	184015105100
6	8,00	1,00	5,00	0,02690	2,69	100	184010006100
8	10,00	1,00	4,00	0,03460	3,46	100	184010008100
10	13,00	1,50	4,50	0,06600	3,30	50	184015010050
10	14,00	2,00	6,00	0,09240	4,62	50	184015010250
12	16,00	2,00	5,00	0,10780	5,39	50	184015012250
12	15,00	1,50	4,00	0,07800	3,90	50	184015012050
16	20,00	2,00	4,00	0,13860	6,93	50	184020016050
19	23,00	2,00	3,50	0,16200	8,10	50	184024019050
19	27,00	4,00	6,30	0,35400	17,70	50	184024019450
25	31,00	3,00	3,50	0,32320	16,16	50	184024025350
40	48,00	4,00	3,00	0,67720	16,93	25	184024040025
40	50,00	5,00	4,00	0,86560	21,64	25	184024050025
65	75,00	5,00	2,50	1,34000	33,50	25	184026550025

Ocono Romania SRL | Bd. Valea Belciugatele nr. 15 | Comuna Belciugatele | Călărași, 917010 | Romania | T +40 374 20076-5/6 | romania@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.
Date: 23.11.2026