Ocono

Romania

SUPERFLEX

Very flexible hose made of a special PVC / BUNA compound

Applications liquid manure spreading, fertilizer spreading, silo vehicles, agriculture, waste water

Structure PVC/Buna, grey, opaque, plastic spiral / rigid PVC

Temperature -40°C up to 60°C

Properties very good flexibility, very high vacuum resistance, smooth inside, corrugated outside, very good chemical resistance, good ozone- & UV-resistance, weather proof

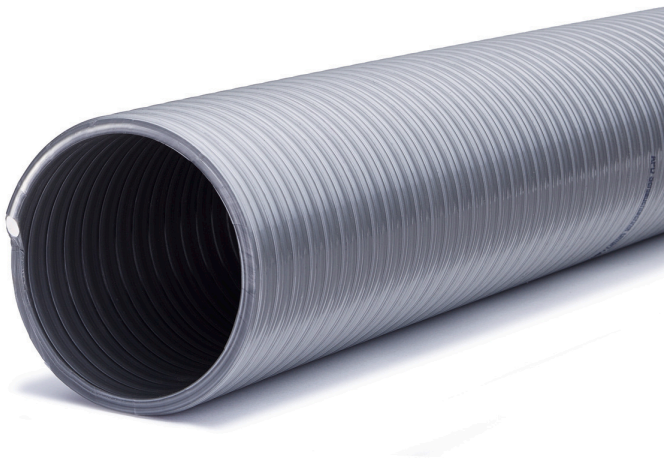





made in Germany

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,40	4,20	110	7,00	0,88	0,50000	25,00	50	112144025050
63	74,00	5,60	210	4,00	0,88	1,40000	72,80	50	100398063050
90	102,00	6,20	290	3,00	0,88	2,21000	110,50	50	100398090050
102	116,40	7,20	320	3,00	0,88	2,70000	135,00	50	100398102050
110	124,00	7,20	410	3,00	0,88	3,19000	79,75	25	100398110025
127	141,00	7,80	620	2,00	0,88	3,60000	90,00	25	100398127025

Ocono Romania SRL | Bd. Valea Belciugatele nr. 15 | Comuna Belciugatele | Călărași, 917010 | Romania | T +40 374 20076-5/6 | romania@ocono.com

All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. Technical changes and color deviations are subject to change. Other versions are available upon request.

Date: 24.11.2026